

EUROPAN



www.europan.com.tr




ABOUT US

EUROPAN was established in 2021 as a joint venture with the aim of designing and manufacturing sectional door panels.

Production Stage

Europan has the capability to manufacture various types of sectional door panels with high-tech manufacturing line.

The continuous sandwich panel line provides flexible & precise production .

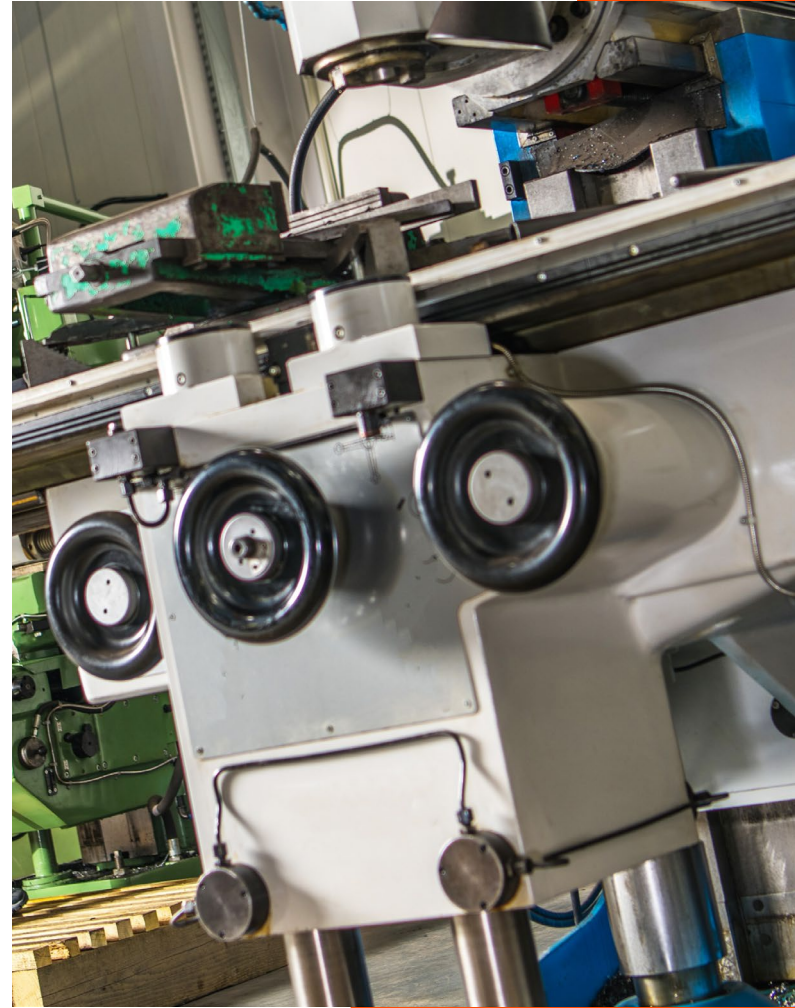




PRODUCTS

Sectional Door Panels

The European sectional door panels are manufactured with EuroPUR polyurethane in different thicknesses to reach superior insulation properties. Four different surface embossments and eight colours are available in our product portfolio. More colour and embossment options can be offered upon request.

Sectional Door Panel

EPPS140 / 160 / 180

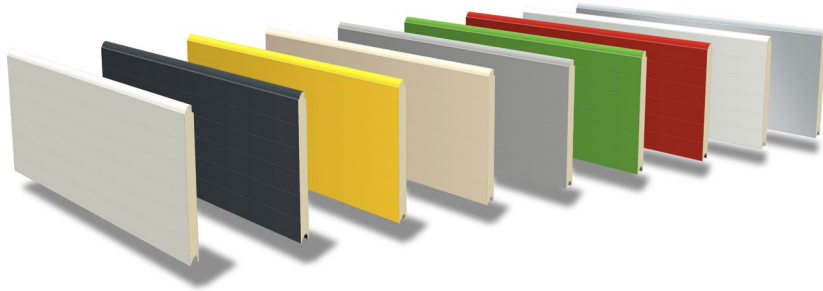

Packing Information

There are 16-18 European panels per pack with length ranging from 2.00m to 13.60m.

Insulation

The EuroPUR rigid polyurethane has a density of 42~44 kg/m³.

Steel Sheets

DX-51 Grade, Z100, 0.45mm/0.50mm, 15µm polyester coated cold rolled galvanized steel sheets.



Panel Type

Thickness: 40/60/80mm Surface: Smooth

Colour Options


Available RAL Colours

9002, 9005, 1018, 1015, 7016, 6018, 3000, 9003, 9006

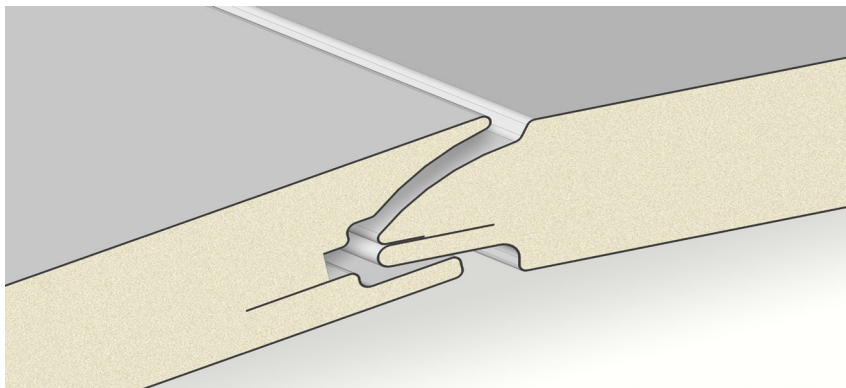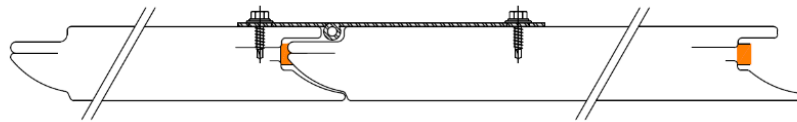

Sectional Door Panel

EPPW140 / 160 / 180

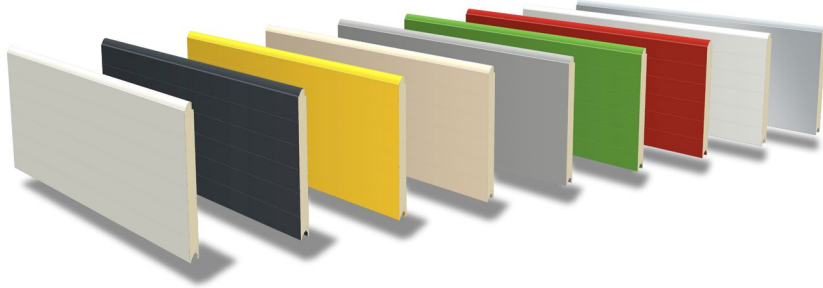

Packing Information

There are 16-18 European panels per pack with length ranging from 2.00m to 13.60m.

Insulation

The EuroPUR rigid polyurethane has a density of 42~44 kg/m³.

Steel Sheets

DX-51 Grade, Z100, 0.45mm/0.50mm, 15µm polyester coated cold rolled galvanized steel sheets.



Panel Type

Thickness: 40/60/80mm Surface: Woodgrain

Colour Options


Available RAL Colours

9002, 9005, 1018, 1015, 7016, 6018, 3000, 9003, 9006

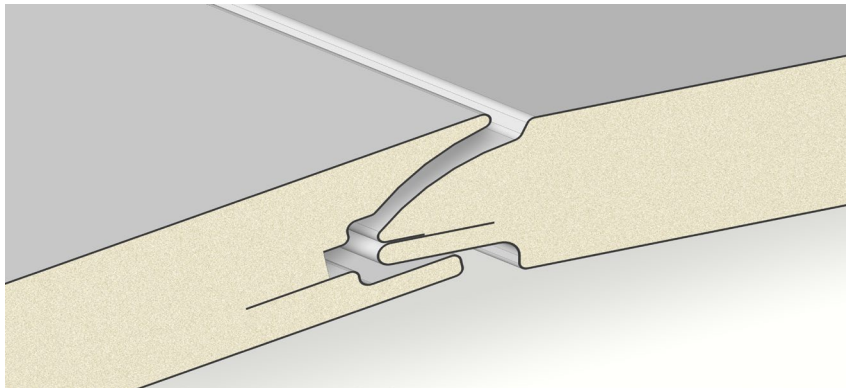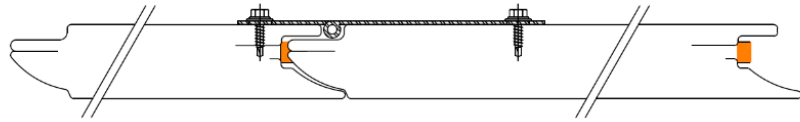

Sectional Door Panel

EPPR140 / 160 / 180

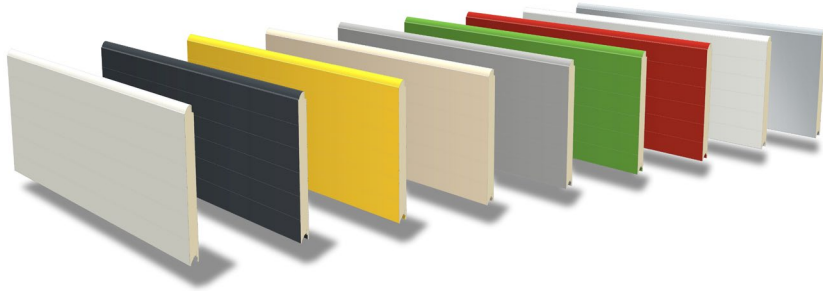

Packing Information

There are 16-18 European panels per pack with length ranging from 2.00m to 13.60m.

Insulation

The EuroPUR rigid polyurethane has a density of 42~44 kg/m³.

Steel Sheets

DX-51 Grade, Z100, 0.45mm/0.50mm, 15µm polyester coated cold rolled galvanized steel sheets.



Panel Type

Thickness: 40/60/80mm Surface: Ribbed with or without Woodgrain pattern

Colour Options


Available RAL Colours

9002, 9005, 1018, 1015, 7016, 6018, 3000, 9003, 9006

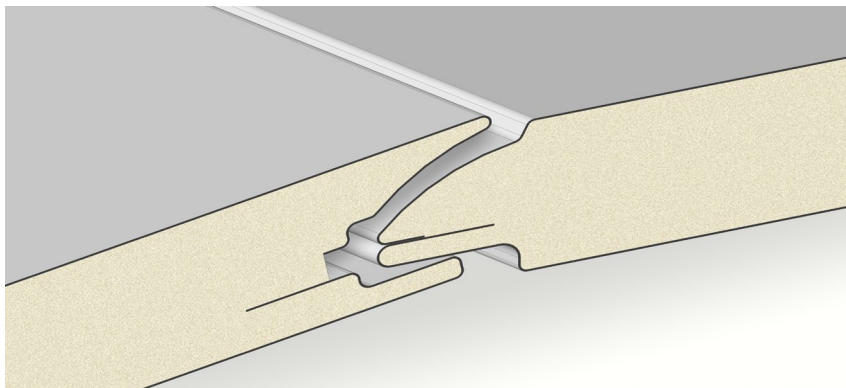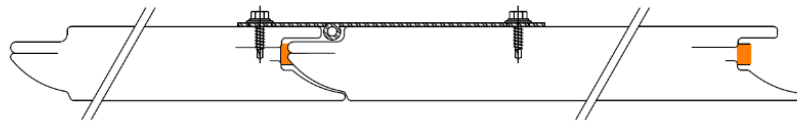

Sectional Door Panel

EPPM140 / 160 / 180

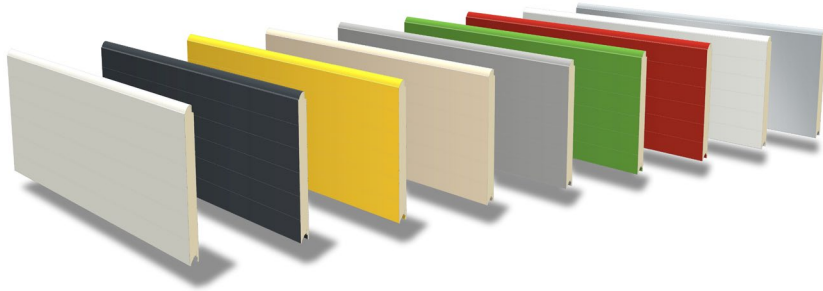

Packing Information

There are 16-18 European panels per pack with length ranging from 2.00m to 13.60m.

Insulation

The EuroPUR rigid polyurethane has a density of 42~44 kg/m³.

Steel Sheets

DX-51 Grade, Z100, 0.45mm/0.50mm, 15µm polyester coated cold rolled galvanized steel sheets.



Panel Type

Thickness: 40/60/80mm Surface: Microribbed

Colour Options

Available RAL Colours

9002, 9005, 1018, 1015, 7016, 6018, 3000, 9003, 9006

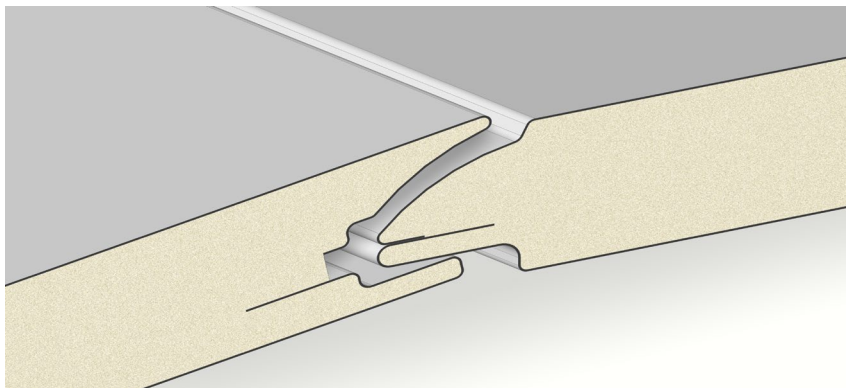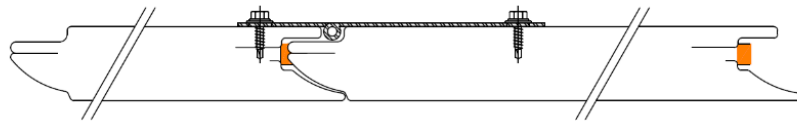

CONTACT WITH US FOR MORE INFORMATION

E-mail

info@europan.com.tr

Web Site

www.euopan.com.tr

EUROPAN